




# Centrico

Seamless Stainless Steel Tubing

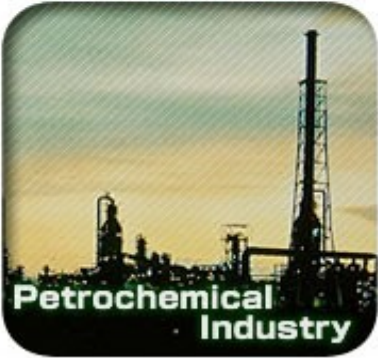

Element	Composition, wt. %
Carbon	0.035 max
Silicon	1.00 max
Manganese	2.00 max
Phosphorus	0.045 max
Sulphur	0.03 max
Nickel	10.0 to 14.0
Chromium	16.0 to 18.0
Molybdenum	2.00 to 3.00

Seamless stainless steel tube  
 ASTM A269 / A213(A.W.)  
 TP316/316L cold drawn  
 Hardness RB 80 maximum

Tubing OD	Wall Thickness	Part Number	Length	Weight	Allowable Working Pressure
inches	inches		m	kg	psi
1/4	0.035	T-316L-0250-0035	6.0	0.73	5200
	0.049	T-316L-0250-0049		0.95	7600
	0.065	T-316L-0250-0065		1.16	10300
3/8	0.035	T-316L-0375-0035		1.16	3350
	0.049	T-316L-0375-0049		1.55	4850
	0.065	T-316L-0375-0065		1.96	6550
1/2	0.035	T-316L-0500-0035		1.58	2650
	0.049	T-316L-0500-0049		2.14	3750
	0.065	T-316L-0500-0065		2.74	5150
	0.083	T-316L-0500-0083		3.36	6750
3/4	0.049	T-316L-0750-0049		3.32	2450
	0.065	T-316L-0750-0065		4.32	3350
	0.083	T-316L-0750-0083		5.38	4250
1	0.049	T-316L-1000-0049		4.52	1800
	0.065	T-316L-1000-0065		5.90	2400
	0.083	T-316L-1000-0083	7.37	3100	

# Centrico

## Seamless Stainless Steel Tubing